

For intensive cleaning, degassing emulsifying, homogenization, & the acceleration of chemical processes in the research, production, and maintenance sectors.


Features:

- Useful for Cleaning and Removing Dirt, Grease, Waxes and Oil from all Lab Instruments by Ultrasonic Frequency
- Made of Stainless Steel, Finished Surface
- Convenient Preset Function: Heating and Timer
- Bottom-Mounted Drain (except AC-120H)
- Include basket & lid.

Laboratories	Cleaning, degassing, homogenizing, emulsifying,
Hospital, Clinics	Cleaning surgical instrument, manufacture of implants and stents
Dental, Tatoo	Cleaning instruments for dental treatment, cleaning dental prostheses
Optics	Cleaning spectacles, optical lenses before coating etc.
Jewelry & watches	Cleaning chains, rings, straps, watches parts etc.
Chemical sector	Cleaning reactors, acceleration of chemical reactions etc.
Plastics industry	Cleaning injection moulds etc.
Car & Aircraft industry	Cleaning engine parts carburetors etc.
Mobile phones & Electronics	Cleaning PCB boards
Printing shops	Cleaning ink cassetes

AC-Analog Series

Ultrasonic cleaner-set with analog timer & temperature controller, with wire basket & lid, highly effective & efficient cleaning, stainless steel, up to 80°C, 0~20min, 40kHz frequency. Made of stainless steel, finished surface.

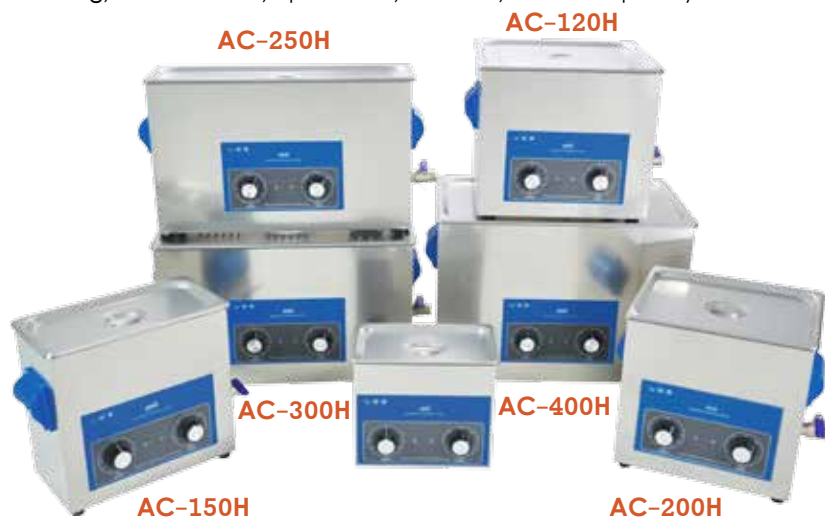

ACP-Series, Power adjustable ultrasonic cleaner

- Power adjustable from 30% to 100% -suitable for different cleaning (from 3L and above)
- With mechanical control timer & heater
- Memory function
- Stamping tank without welding gap for better waterproof
- Timer: 0-30 minutes
- Ceramic heaters for better heating effect.



ACP-200H
With power control

Analog	AC-120H	AC-150H	AC-200H	AC-250H	AC-300H	AC-400H
Analog+Power controll	ACP-120H	ACP-150H	ACP-200H	ACP-250H	ACP-300H	ACP-400H
Operating Frequency	40Khz	40Khz	40Khz	40Khz	40Khz	40Khz
Tank capacity (Liters)	3	6	9	13	20	27
Internal tank size(mm)	L240xW140xH100	L300xW155xH150	L300xW240xH150	L330xW300xH150	L500xW300xH150	L500xW300xH200
External DIM.(mm)	L270xW170xH240	L330xW180xH310	L330xW270xH310	L360xW330xH310	L550xW330xH310	L550xW330xH360
Internal tank stuff	SUS 304 #1.0t					
External stuff	Steel plate toast paint					
LID cover stuff	Stainless steel SUS 304					
Timer	1-20 min (ACP-Series: 1-30 min)					
Ultrasonic power (AC Series)	100W	150W	200W	300W	400W	500W
Power adjustable (ACP Series)	30 - 100W	45 - 150W	60 - 200W	90 - 300W	120 - 400W	150 - 500W
Heating Power	100W	300W	300W	400W	500W	500W
Net Weight	3.2Kg	6.2Kg	8.2Kg	10.2Kg	13.2Kg	14.9Kg
Drainage	None	Have				
Power source	AC100~120V/AC220~230V 50/60Hz					