


**BWLC-C2 Series, Precision Balances**



A1 version




A2 version

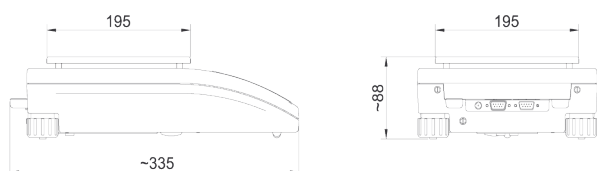

Balances Series BWLC-C2 are designed for fast and precise mass determination in laboratory and industrial conditions. They can also be used in areas with no access to mains (230V), as their standard equipment they include internal rechargeable battery and RS 232 output. All kinds of this balance (pan size: 128x128, and 195x195 mm) are equipped with stainless steel weighing platform & backlit LCD display providing good reading of weighing result.

Balances have possibility of weighing loads outside weighing platform (so called under hook weighing), where a load is hung under the instrument. This is an alternative for weighing loads with non-standard dimensions and shapes. This means of weighing is also useful for determination of density of solids and liquids with application of standard functions of the balance.



**Optional accessories:**

- Printers
- PC keyboard
- Foot button for tare or print functions
- Rack for under hook weighing
- LCD additional display
- External rechargeable battery pack
- Suitcase for balance
- Computer software

Model	BWLC-0.6-A1-C2*	BWLC-1-A2-C2	BWLC-1.2-A2-C2	BWLC-6-A2-C2*
<b>Max capacity</b>	0.6kg	1kg	1.2kg	6kg
<b>Readability</b>	0.01g	0.01g	0.02g	0.1g
<b>Tare range</b>	-0.6kg	-1kg	-3kg	-6kg
<b>Repeatability</b>	0.02g	0.03g	0.02g	0.2g
<b>Linearity</b>	±0.2g	±0.03g	±0.02g	±0.2g
<b>Pan size</b>	128 x 128mm		195 x 195mm	
<b>Interface</b>	RS 232			
<b>Working temp.</b>	+15° - +30°C			
<b>Stabilization time</b>	3 s			
<b>Power supply</b>	230V / 11V AC or 120V / 11V AC, (accumulator)			
<b>Calibration</b>	internal (automatic)			
<b>IP rating</b>	IP 43			
<b>Display</b>	LCD (backlit)			
<b>Net/Gross weight</b>	1.2 / 2kg		3 / 4kg	
<b>Packaging size</b>	320x210x150mm		320x210x150mm	

\* verified balances